

Technical Data Sheet G Series

Basic Info

KSF G 66x650-3xM8

Nominal length (mm)

650

Tube diameter (mm)

66

Weight (kg)

1.85

Item number

25452



KSF G 66x650-3xM8

Construction

- Nut: DIN EN ISO 4032 - 8
- Continuous welded helix
- Coating: Hot-dip galvanized according to DIN EN ISO 1461
- Patented conical body forged from a single piece

Applications



Accessories




Special
Granulate 500 g
Item No. 21823



Screwing Bar short
0.60 kg
Item No. 20070

Technical Data

KSF G 66x650-3xM8	
a	Length (mm) (± 25 mm) 650
b	Shaft outer diameter (mm) 66
c	Inner diameter (mm) 62
d	Diameter setting (mm) 62 55.5 50 43 38.5 34
e	Depth setting (mm) (± 25 mm) 210 228 245 276 317 395
f	Thread 3 x M8

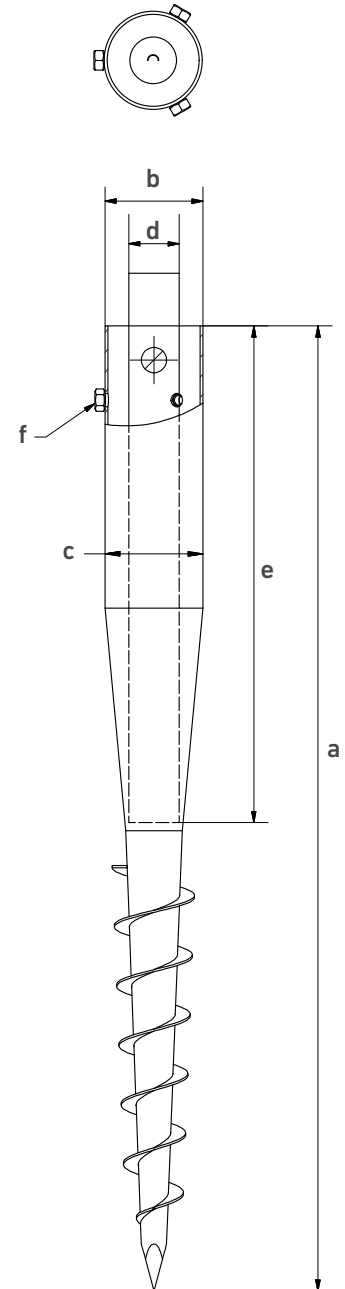

Online Service

KSF G 66x650-3xM8

Webkey
G2545211D



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com