

Technical Data Sheet M Series

Basic Info

KSF M 89x3000-M24	KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
Nominal length (mm)			
3000	2100	1600	1300
Tube diameter (mm)			
88,90	88,90	88,90	88,90
Weight (kg)			
26,00	18,00	14,00	11,50
Item number			
25306	25302	25301	25300

Construction

- Flange: Sheet metal S355
- Nut: DIN EN ISO 4032-8
- Continuous welded helix
- Coating: Hot-dip galvanized according to DIN EN ISO 1461

Applications



KSF M 89x
1600-M24


Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable

Technical Data

	KSF M 89x3000-M24	KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
a Length (mm) (± 25 mm)	3070	2080	1580	1280
b Shaft outer diameter (mm)	88,90	88,90	88,90	88,90
c Inner diameter (mm)	81,70	81,70	81,70	81,70
d Thread	M24	M24	M24	M24
e Pitch circle diameter (mm)	150	150	150	150
f Pitch circle holes (mm)	6 x \varnothing 14	6 x \varnothing 14	6 x \varnothing 14	6 x \varnothing 14
g Flange wrench size (mm)	160	160	160	160
h Flange outer diameter (mm)	182	182	182	182
i Flange thickness (mm)	10	10	10	10

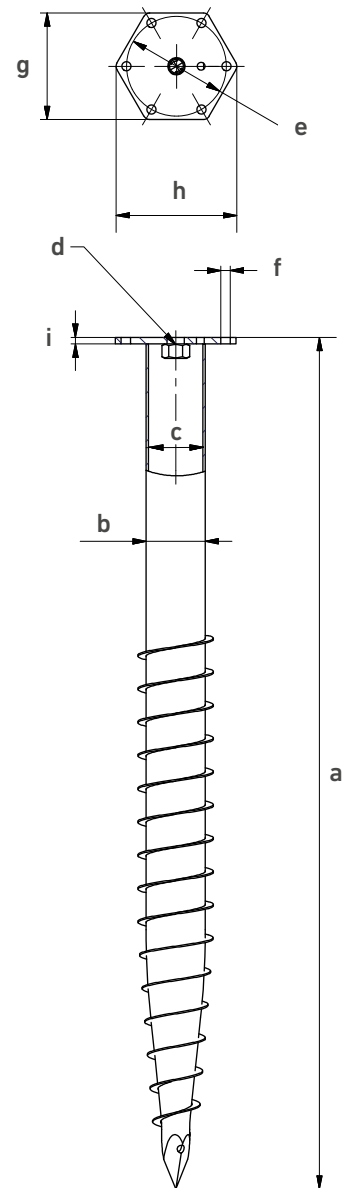

Online Service

KSF M 89x3000-M24	KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
----------------------	----------------------	----------------------	----------------------

Webkey

M2530614D

M2530211D

M2530111D

M2530011D



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com